

# HYUNDAI

5" Outdoor Medium Speed PTZ

# 5MP

## H.265 PTZ Outdoor Medium Speed IR 120M

Model: HY-SS500-PTZ

5MP

H.265

IP66


IR  
CUT

ONVIF

## Features:

- 5MP Outdoor Medium Speed PTZ
- 1/2.8" SONY Stravis Back-illuminated CMOS sensor
- H.264/H.265 Compression Method
- 22X Optical Zoom (f=3.9mm-85.5mm)
- IR Distance 120m Max
- IP66 Outdoor Weatherproof
- Support POE (Optional)
- Support 22X Optical Zoom
- Support IP66 Weatherproof
- Support ONVIF, SLINK protocol

## Dimensions:

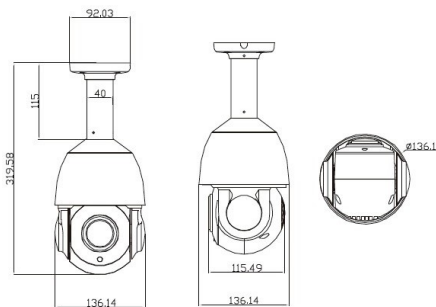

## Specifications:

| Model                     | HY-SS500-PTZ  |
|---------------------------|---|
| <b>Camera</b>             |   |
| Image Sensor              | 1/2.8" SONY Starvis Back-illuminated CMOS Sensor            |
| Horizontal Resolution     | 5MP   |
| Compression               | H.264/H265  |
| S/N Ratio                 | >50db   |
| <b>PTZ</b>                |   |
| Horizontal Rotation Speed | 45°/S   |
| Horizontal Rotation Range | 0°~360°   |
| Tilt Rotation Speed       | 30°/s   |
| Tilt Rotation Range       | 0°~93°  |
| Preset Points             | 220   |
| Guard Tours               | 3 groups  |
| Guard Points              | Max.16 points   |
| <b>Lens</b>               |   |
| Focus Length              | 3.9mm-85.5mm  |
| Focus Control             | 22X Optical Zoom  |
| <b>Night Vision</b>       |   |
| Infrared LED              | ¢ 42x6PCS   |
| IR Range                  | 120m  |
| Day-night mode            | AUTO  |
| <b>Network</b>            |   |
| Network protocol          | TCP/IP, HTTP, FTP, RTSP, UPnP, DNS, NTP, RTP, UDP, IGMP,P2P |
| ONVIF                     | Support   |
| Network interface         | Built-in RJ45 network interface,support 10M/100M IP DATA    |
| Main Stream1              | 2560*1920@20fps   |
| Main Stream2              | 2560*1440@25fps   |
| Main Stream3              | 2304*1296@25fps   |
| Main Stream4              | 1920*1080@25fps   |
| Main Stream5              | 1280*720@25fps  |
| Main Stream6              | 640*512@25fps   |
| Sub Stream1               | 800*448@25fps   |
| Sub Stream2               | 704*576@25fps   |
| Sub Stream3               | 640*360@25fps   |
| Sub Stream4               | 352*288@25fps   |
| <b>Interface</b>          |   |
| Audio                     | Optional  |
| Alarm                     | /   |
| SD Card Slot              | /   |
| POE                       | Optional  |
| <b>General</b>            |   |
| Weatherproof              | IP66  |
| Operating Temperature     | Indoor: 0°~ +40° Outdoor: -40°~ +60°                        |
| Operating Humidity        | ≤90% Non Condensing   |
| Power                     | DC12V 2A/3A   |
| Lightning Protection      | Transient voltage 6000V                                     |
| Dimension                 | 29.5x28x17(cm)  |
| Weight                    | 4.2Kgs  |