

HYUNDAI

24 CH POE



Model: HY-24POE526G

- 24 FE+2Combo SFP Ports with 24 PoE ports
- Port 1, 2 support 802.3bt 60W Hi PoE
- Supports PoE power up to 30W for each port
- Supports PoE IEEE 802.3af/at compliant PDs
- Internal power adapter supply 250W output power
- Support Port VLAN mode
- Support 250meter Long-Range PoE Transmission
- LED indicators for LINK/ACT, Power, PoE Status, 100/1000Mbps
- 8K entry MAC address table with auto-learning and auto-aging

HYUNDAI

24 CH POE

What This Product Does

24*100Mbps+2 Combo Switch with 24-Port PoE provides the seamless network connection. It integrates 1000Mbps Gigabit Ethernet and 10/100Mbps Fast Ethernet network capabilities.

How This Product Works

24 Auto-Negotiation RJ45 ports (port-1 to port-24) of the switch support Power over Ethernet (PoE) function. These PoE ports can automatically detect and supply power with those IEEE 802.3af/at compliant Powered Devices (PDs). In this situation, the electrical power is transmitted along with data in one single cable allowing you to expand your network where there are no power lines or outlets, where you wish to fix devices such as APs, IP Cameras or IP Phones, etc.

Easy To Use

WI-PS526G is easy to install and use. It requires no configuration and installation. With outstanding performance and quality, the WI-PS526G 26-Port Gigabit Switch with 24-Port PoE is a great selection for expanding your home or office network.

HYUNDAI

24 CH POE

Specification:


HARDWARE FEATURES	
Interface	24 100M POE Ports 2 1000M Combo SFP Uplink Ports
Network Media	10Base-T: Pair 2 Category 3(Cat3) and above UTP/STP(≤100m) 100Base-TX: Pair 2 Category 5(Cat5) and above UTP/STP(≤100m) 1000Base-T: Pair 4 Category 5(Cat5e) and above UTP/STP(≤100m) 1000Base-SX: 62.5μm/50μm MMF(2m~550m) 1000Base-LX: 62.5μm/50μm MM(2m~550m) or 10μm SMF(2m~5000m)
Fan Quantity	2 Fan
Power Budget	250W
Internal Power Supply	AC 110~240V 50/60HZ
PoE Ports (RJ45)	Standard: 802.3 af/at compliant PoE Ports: Port1- Port24 Power Supply: 250W
Exchange Capacity	10.8G
Mac Address Table	8K
Packet Forwarding Rate	8Mpps
Buffer	2Mb
Jumbo Frame	10240Bytes
Dimensions	Product Size : 440mm*290mm*45mm (L*W*H)

SOFTWARE FEATURES	
Transmission Method	Store-And-Forward
Advanced Functions	Priority Function Mac Address Auto-Learning And Auto-Aging Store and forward IEEE 802.3x flow control for Full-duplex Mode Backpressure for Half-duplex Mode

OTHERS	
Certification	CE, FCC, RoHS
Package Contents	POE Switch Electric Line Guide Book/Warranty Card
Environment	Working Temperature : -10°C ~ 55°C Storage temperature : -40°C ~ 70°C Working Humidity : 10% ~ 90% RH non-condensing Storage Humidity : 5% ~ 90% RH non-condensing

Application:

Standard POE Mode

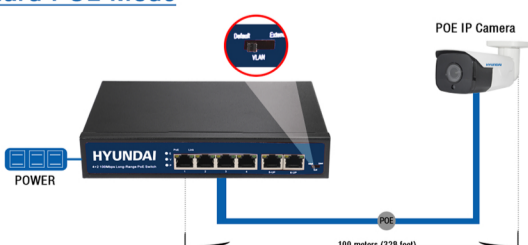

Extend POE Mode

