

HYUNDAI *eco*

4in1 5MP Bullet Camera

5MP 4in1 Bullet Camera



Model: HY-4IN1-5MP




Features:

- 6pcs Array IR LED (IR distance 30 meters when IR on)
- CDS Auto Control in Low Lux
- White Metal casing, separated dual-glasses
- ESD surge protection up to 5000 - volt power supply
- Day & Night (Automatic from color to black)
- Low power consumption
- Long life multi angle IR LED
- UTC Menu

2MP



5MP



WDR : OFF



WDR : ON




4in1 5MP Bullet Camera

Specification:

Model	HY-4IN1-5MP
Image Sensor	1/2.9" CMOS IR-CUT
Resolution	5.0 Mega pixel AHD Camera
Total Pixels	PAL : 2560*1920P
Scanning Frequency	PAL: 15.625 KHz(H), 50Hz(V)
Scanning System	2:1 Interlace
S/N Ratio	More than 52dB (AGC Off)
Min. Illumination	0 LUX
Sync. System	Synchronization
Electronic Shutter	PAL: 1/50 sec
Gamma	Y = 0.45
Video Output	1.0 Vp-p Composite (75Ω)
AGC	Auto
IR LED	6pcs IR Led 30 meter
IR LED Operation	On (1 Lux) / Off (3 Lux)
LED life	More than 10,000 hours
Power Requirement	DC12V (±10%)
Power consumption	IR on: 290mA, IR off: 50mA
Cable	BNC
Operation Temp	-10°C ~ +50°C RH95% MAX
Storage Temp	-20°C ~ +60°C RH95% MAX
Lens	3.6mm Lens
Dimension	200*60*60mm

Deminsion:

Wiring connection:
Basic system connection

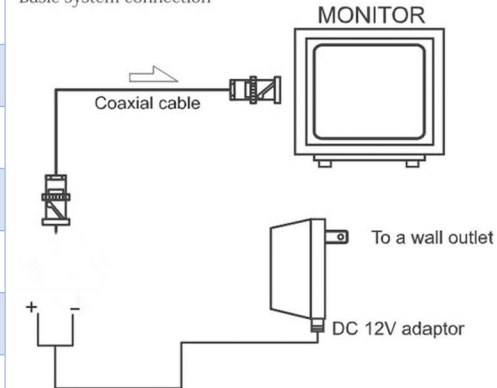

Full High Definition (5MP)



On-Screen Display



Low Light Illumination



Up The Coax



Weatherproof



Smart IR